



## ATTENTION

For a cold peel transfer paper, please wait 10~15 sec and peel off paper. As for a hot peel paper, Please peel off paper at once after printing. (had better peel paper in diagonal line)  
Successful printing require right time, temp as well as pressure, therefore better to have a try first.

## PROBLEMS AND SOLVES

- 1. Machine is still of when power switch is on**  
Power connector is loosed or fuse broken
- 2. Pressure knob is hard to adjust**  
Add a little lubricating oil into screw connection
- 3. Heating Platen does not work**  
Faulty in controller/ solid relay/ heating element
- 4. Hard to lift heating platen**  
Counterclock wise adjust pressure knob
- 5. Alarm does not sound**  
Controller problem or time switch broken



[www.bestsub.com](http://www.bestsub.com)



# PREMIUM SWINGER PRESS

JTSYN38

Manual



## Product Information




**Item Name: Premium Swinger Press**  
**Item No.: JTSYN38**

- Application: T-shirt, Puzzle, Towel, etc.
- Voltage: 110V/220V
- Power: 1.4KW, 1.7KW, 2.5 KW
- Time Range: 0~999 sec.
- Max. Temp.: 245°C (473°F)
- Heating Element: 380x380mm
- Package Size: 75.4x50x53.5cm
- G.W: 50kgs

This machine could transfer photos, words on cotton, fiber, metal, ceramic, glass etc. suitable for producing gift, advertisement etc.

NOTE: This machine is not suitable for minors to use or food processing.

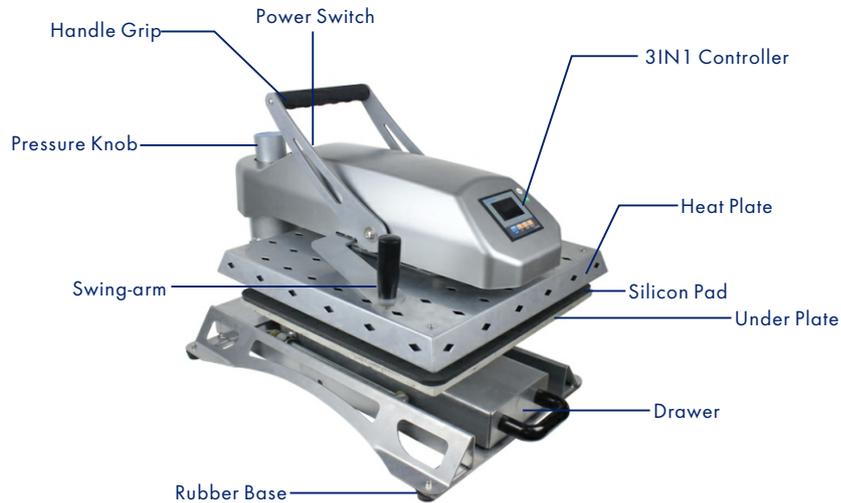

## Usage

1. Connect with power plug, turn on power switch, the indicator light works, then you can set your desired right temp and time.
2. After set, the machine will heat up(200°C about 15 minutes)
3. Raising up handle, place printing materials on working table, try for a right pressure.
4. When machine reaches the set temp, then place the printing materials on working table, press down the handle, then push the time clock, when reaching the set time, the machine sounds, then lift up the handle and take out the printing materials.

## Operation Manual

LCD CONTROLLER



1. Connect power and turn on power switch.

TEMP. SETING WINDOW



2. Press "SET" key, and /to set temp.

TIME. SETING WINDOW



3. Press "SET" key, and /to set time.

WORKING WINDOW



4. Press "SET" to finish setting, later lift heating platen and place clothess and press.



5. Lift heating platen after alarm sound, take out clothes, peel off the transfer paper, finished!



- P.S. Long press "RESET" key able to clear counter

## Reference Data

Inkjet transfer	Light: 185°C/365°F, 15 sec. Dark: 165°C/330°F, 25 sec.
Laser transfer paper	Light: 180°C/355°F, 15 sec. Dark: 160°/320°F, 25sec.
Sublimation Paper	200°C/390°F, 25sec.
Transfer Vinyl	150°C/300°F, 15sec +5 sec. re-press